

New

New impact wrenches

LMS 61 HR25



LTS 7 series



LMS 61 HR25

Super strong 1" impact!



- New high capacity model!
- Torque up to 1800 Nm!
- Weight only 5,1 kg!
- Extremely durable!

LMS 61 HR25

Enormous power in small package!

Enhanced single-hammer impact mechanism

Powerful air motor for high torque and fast tightening

Two stage, low force trigger to ensure easy handling and operator comfort


Rubber grip insulates the hand from cold and vibrations

Adjustable silencer to redirect the exhaust air




LMS 61 HR25


Designed for operator comfort!

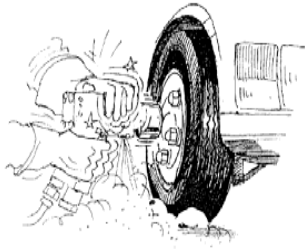


Low vibration level

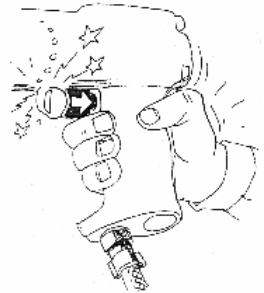

Rubber grip

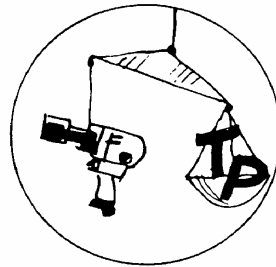

Well balanced

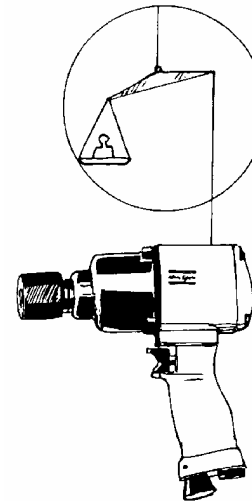

Low weight




Low force trigger

Minimum side to centre distance


Non shut-off impact range

3/8" to 1" models

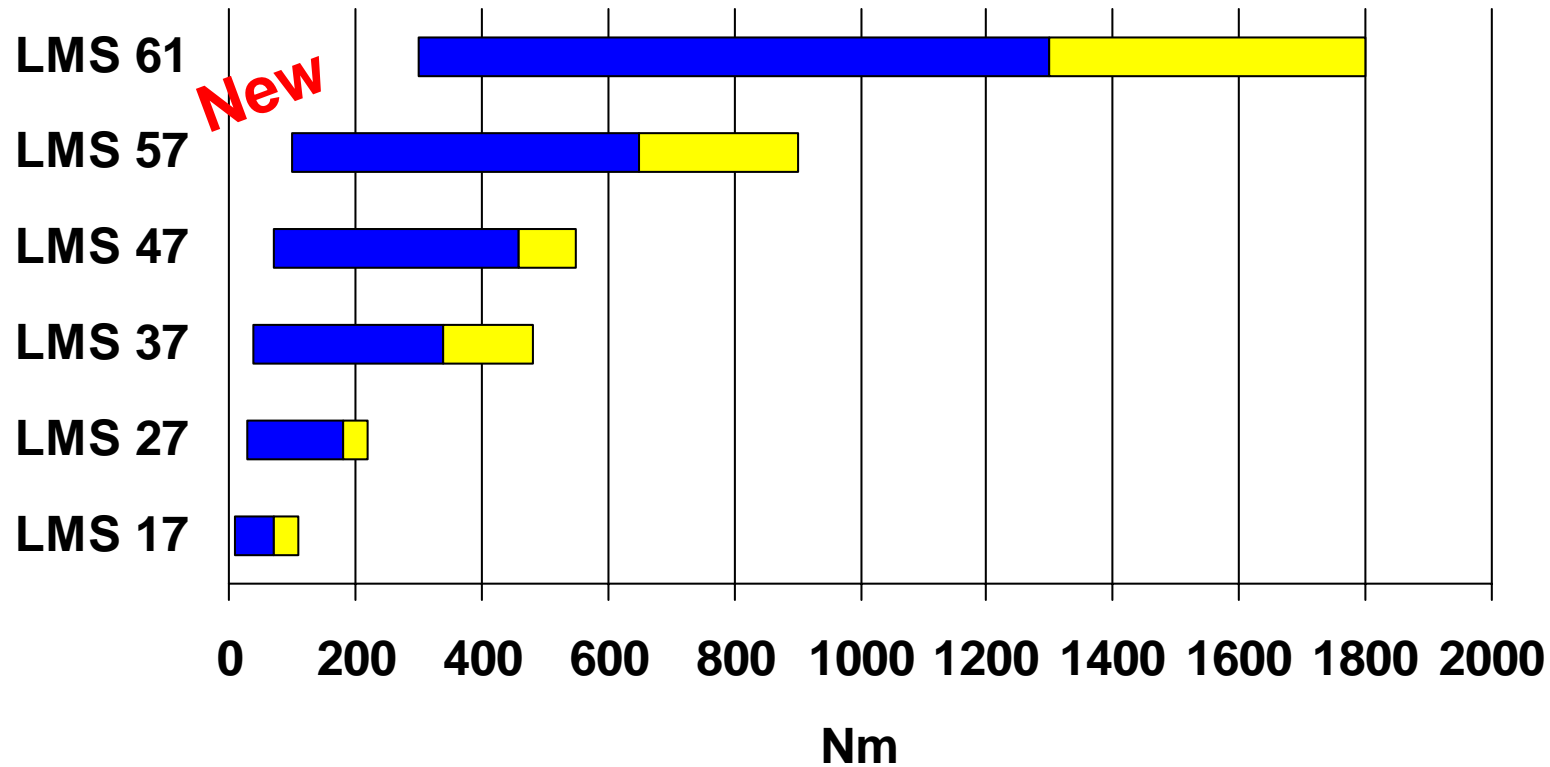


Non shut-off impact range

1" to 1 1/2" models

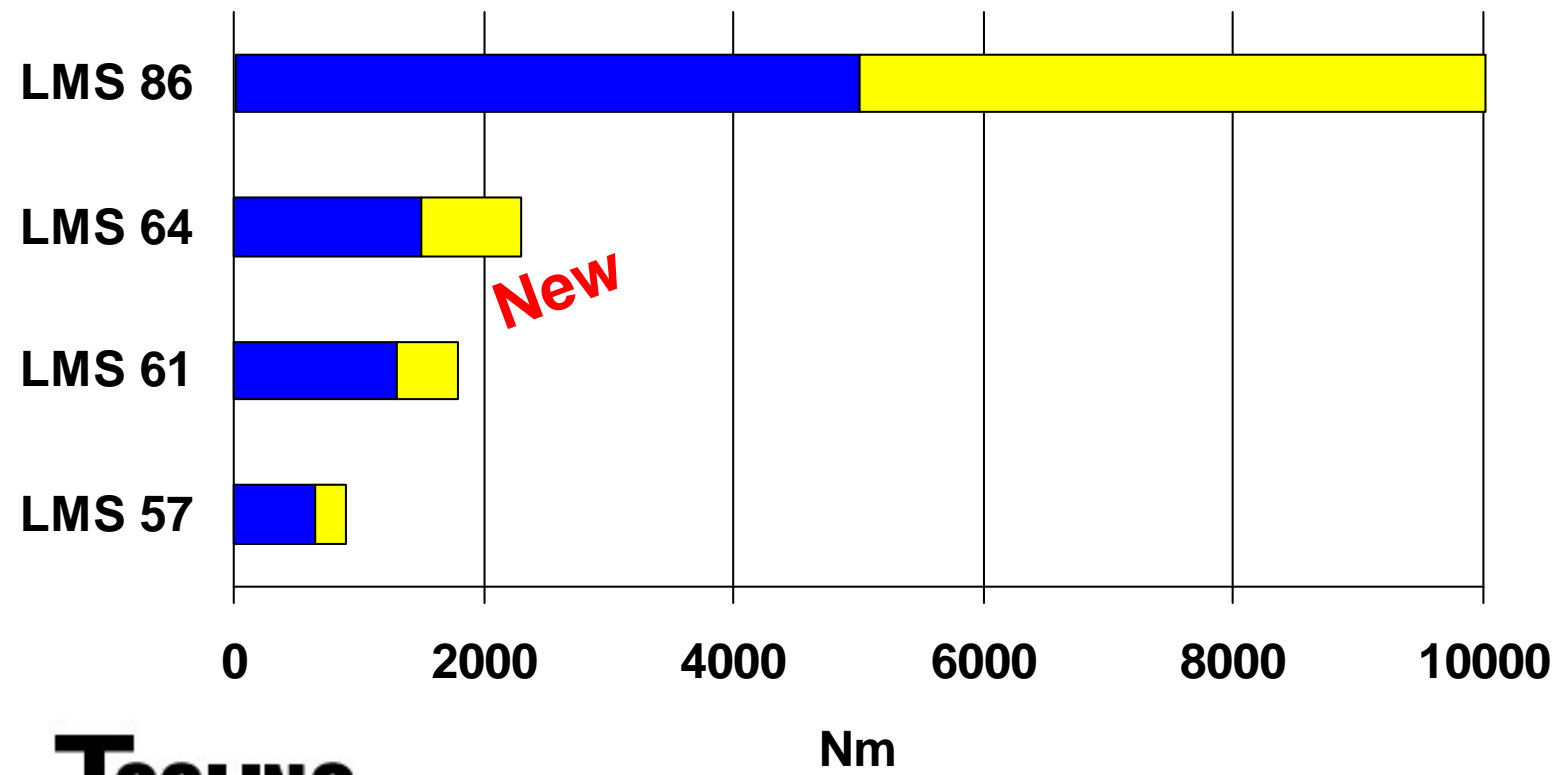

LTS 7 series

New features!

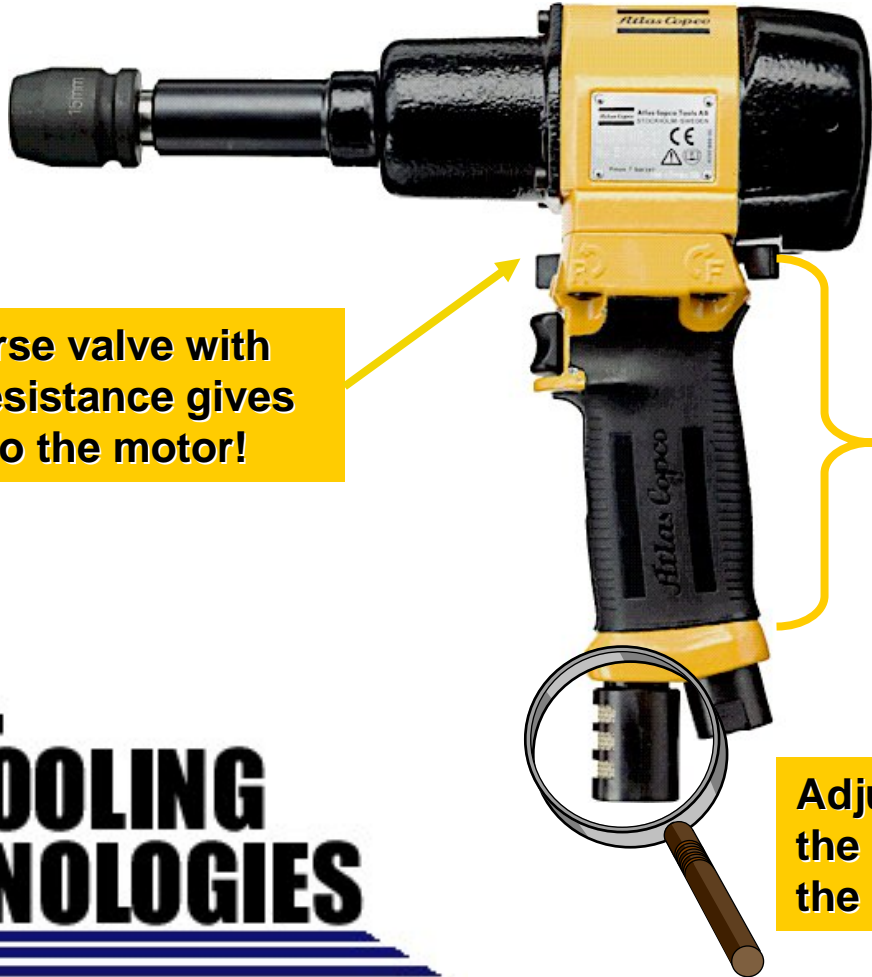


New reverse valve with less air resistance gives more air to the motor!

New handle with less air resistance gives more air to the motor!

Adjustable silencer allows the operator to redirect the exhaust air!

LTS 7 series

Now even wider torque range!

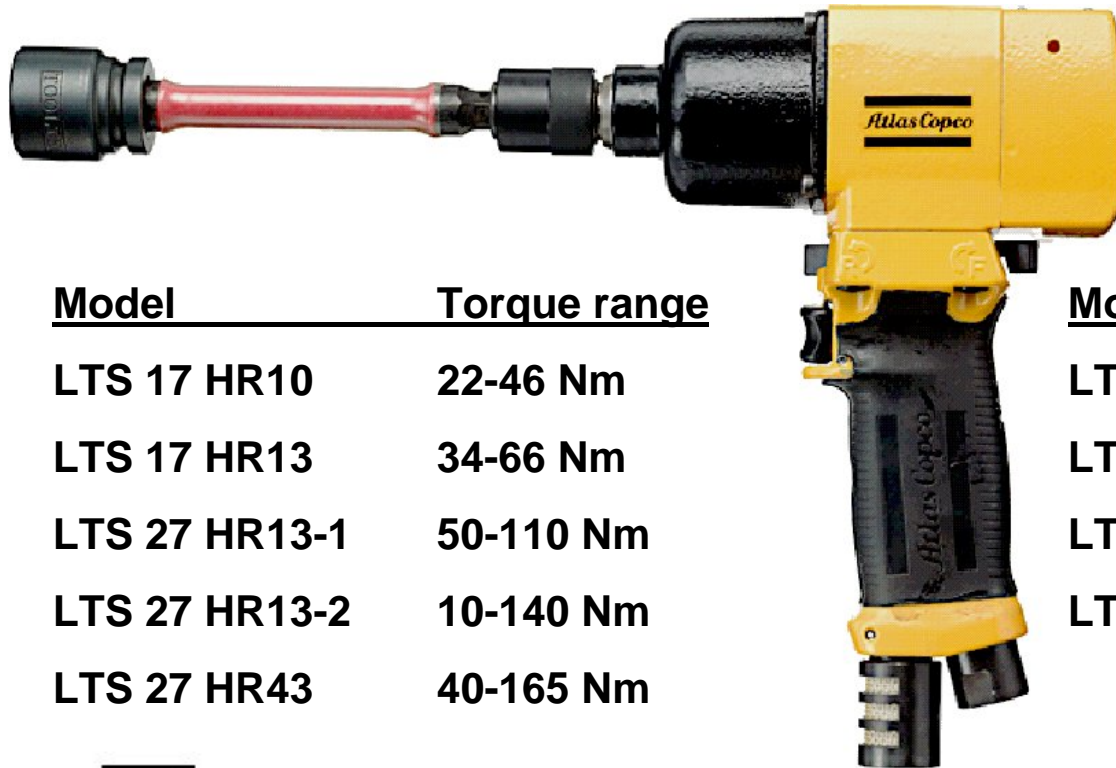

Model Torque range

LTS 17 HR10	22-46 Nm
LTS 17 HR13	34-66 Nm
LTS 27 HR13-1	50-110 Nm
LTS 27 HR13-2	10-140 Nm
LTS 27 HR43	40-165 Nm

Model Torque range

LTS 37 HR13	80-340 Nm
LTS 37 HR16	120-340 Nm
LTS 57 HR20	200-550 Nm
LTS 57 HR25	200-650 Nm


**TOOLING
TECHNOLOGIES**

LLC

Atlas Copco

LTS 7 series

The complete range

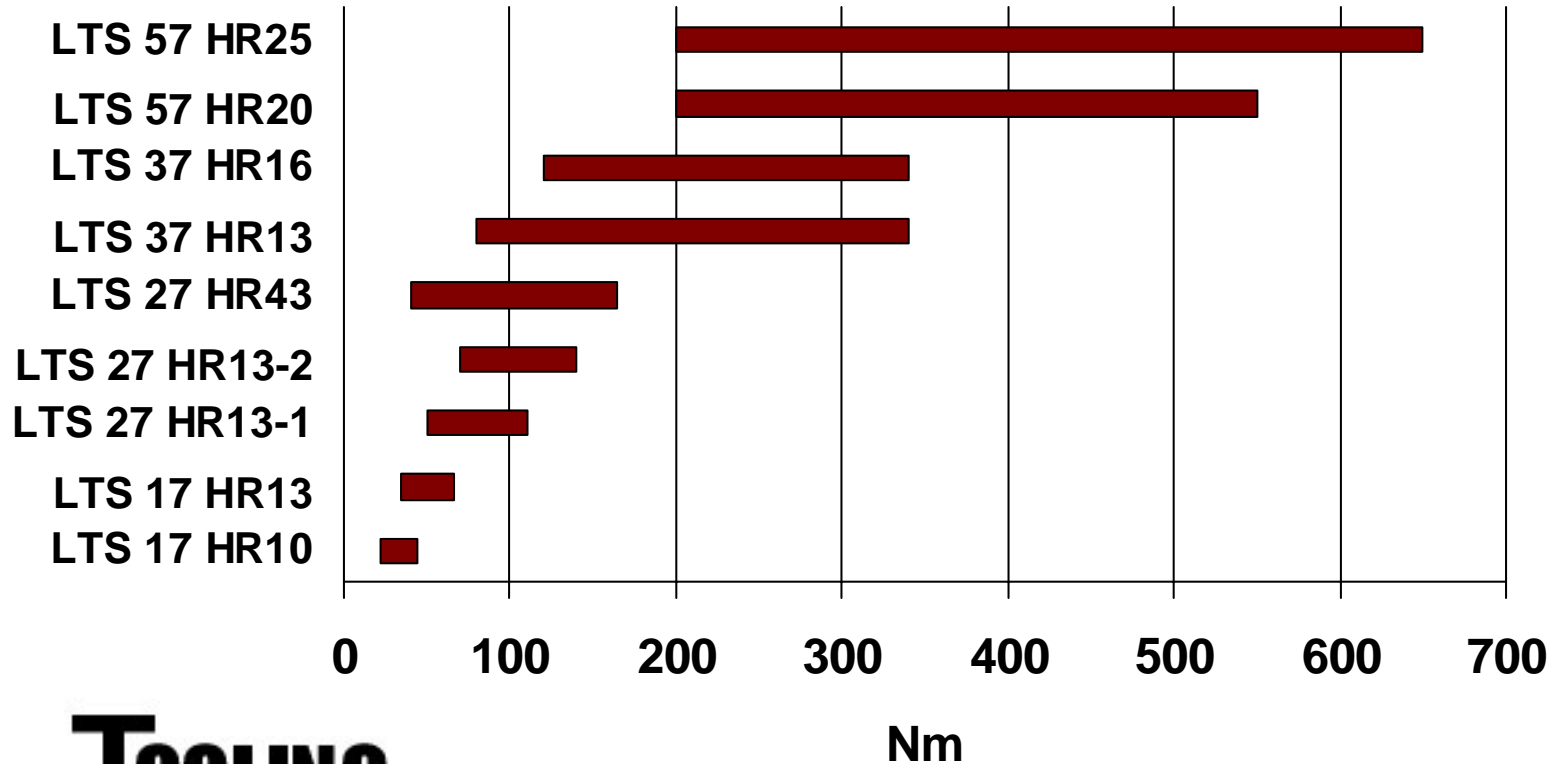

Product data

New products

	Bolt capacity (mm)	Square drive (in)	Torque range (Nm)	Max Torque (Nm)	Weight (kg)	Air consumption (l/s)	Rec. Hose size (mm)	Ordering number
LMS 61 HR25	20-24	1	300-1300	1800	5,1	12	12,5	8434 1610 00
LTS 17 HR10	8-10	3/8	22-44	-	2,0	10	10	8434 1172 19
LTS 17 HR13	8-10	½	34-66	-	2,0	10	10	8434 1172 01
LTS 27 HR13-1	10-12	½	50-110	-	2,6	10	10	8434 1272 00
LTS 27 HR13-2	10-14	½	70-140	-	2,6	10	10	8434 1272 18
LTS 27 HR43 ^a	10-14	7/16 ^a	40-165	-	2,5	10	10	8434 1272 59
LTS 37 HR13	12-14	½	80-340	-	3,7	13	10	8434 1372 41
LTS 37 HR16	12-16	5/8	120-340	-	3,7	13	10	8434 1372 09
LTS 57 HR20	18-20	¾	200-550	-	5,3	16	12,5	8434 1571 08
LTS 57 HR25	18-22	1	200-650	-	5,3	16	12,5	8434 1571 40

^a = Female hex. quick change chuck. ½" square drive on torsion bar.

Air inlet thread: LMS 61, LTS 17, LTS 27, LTS 37, LTS 57=3/8"